

Java Code

```
public class C {
```


```
  int m(int i) {
```

```
    m(i);
```

```
  }
```

```
}
```

Simplified AST

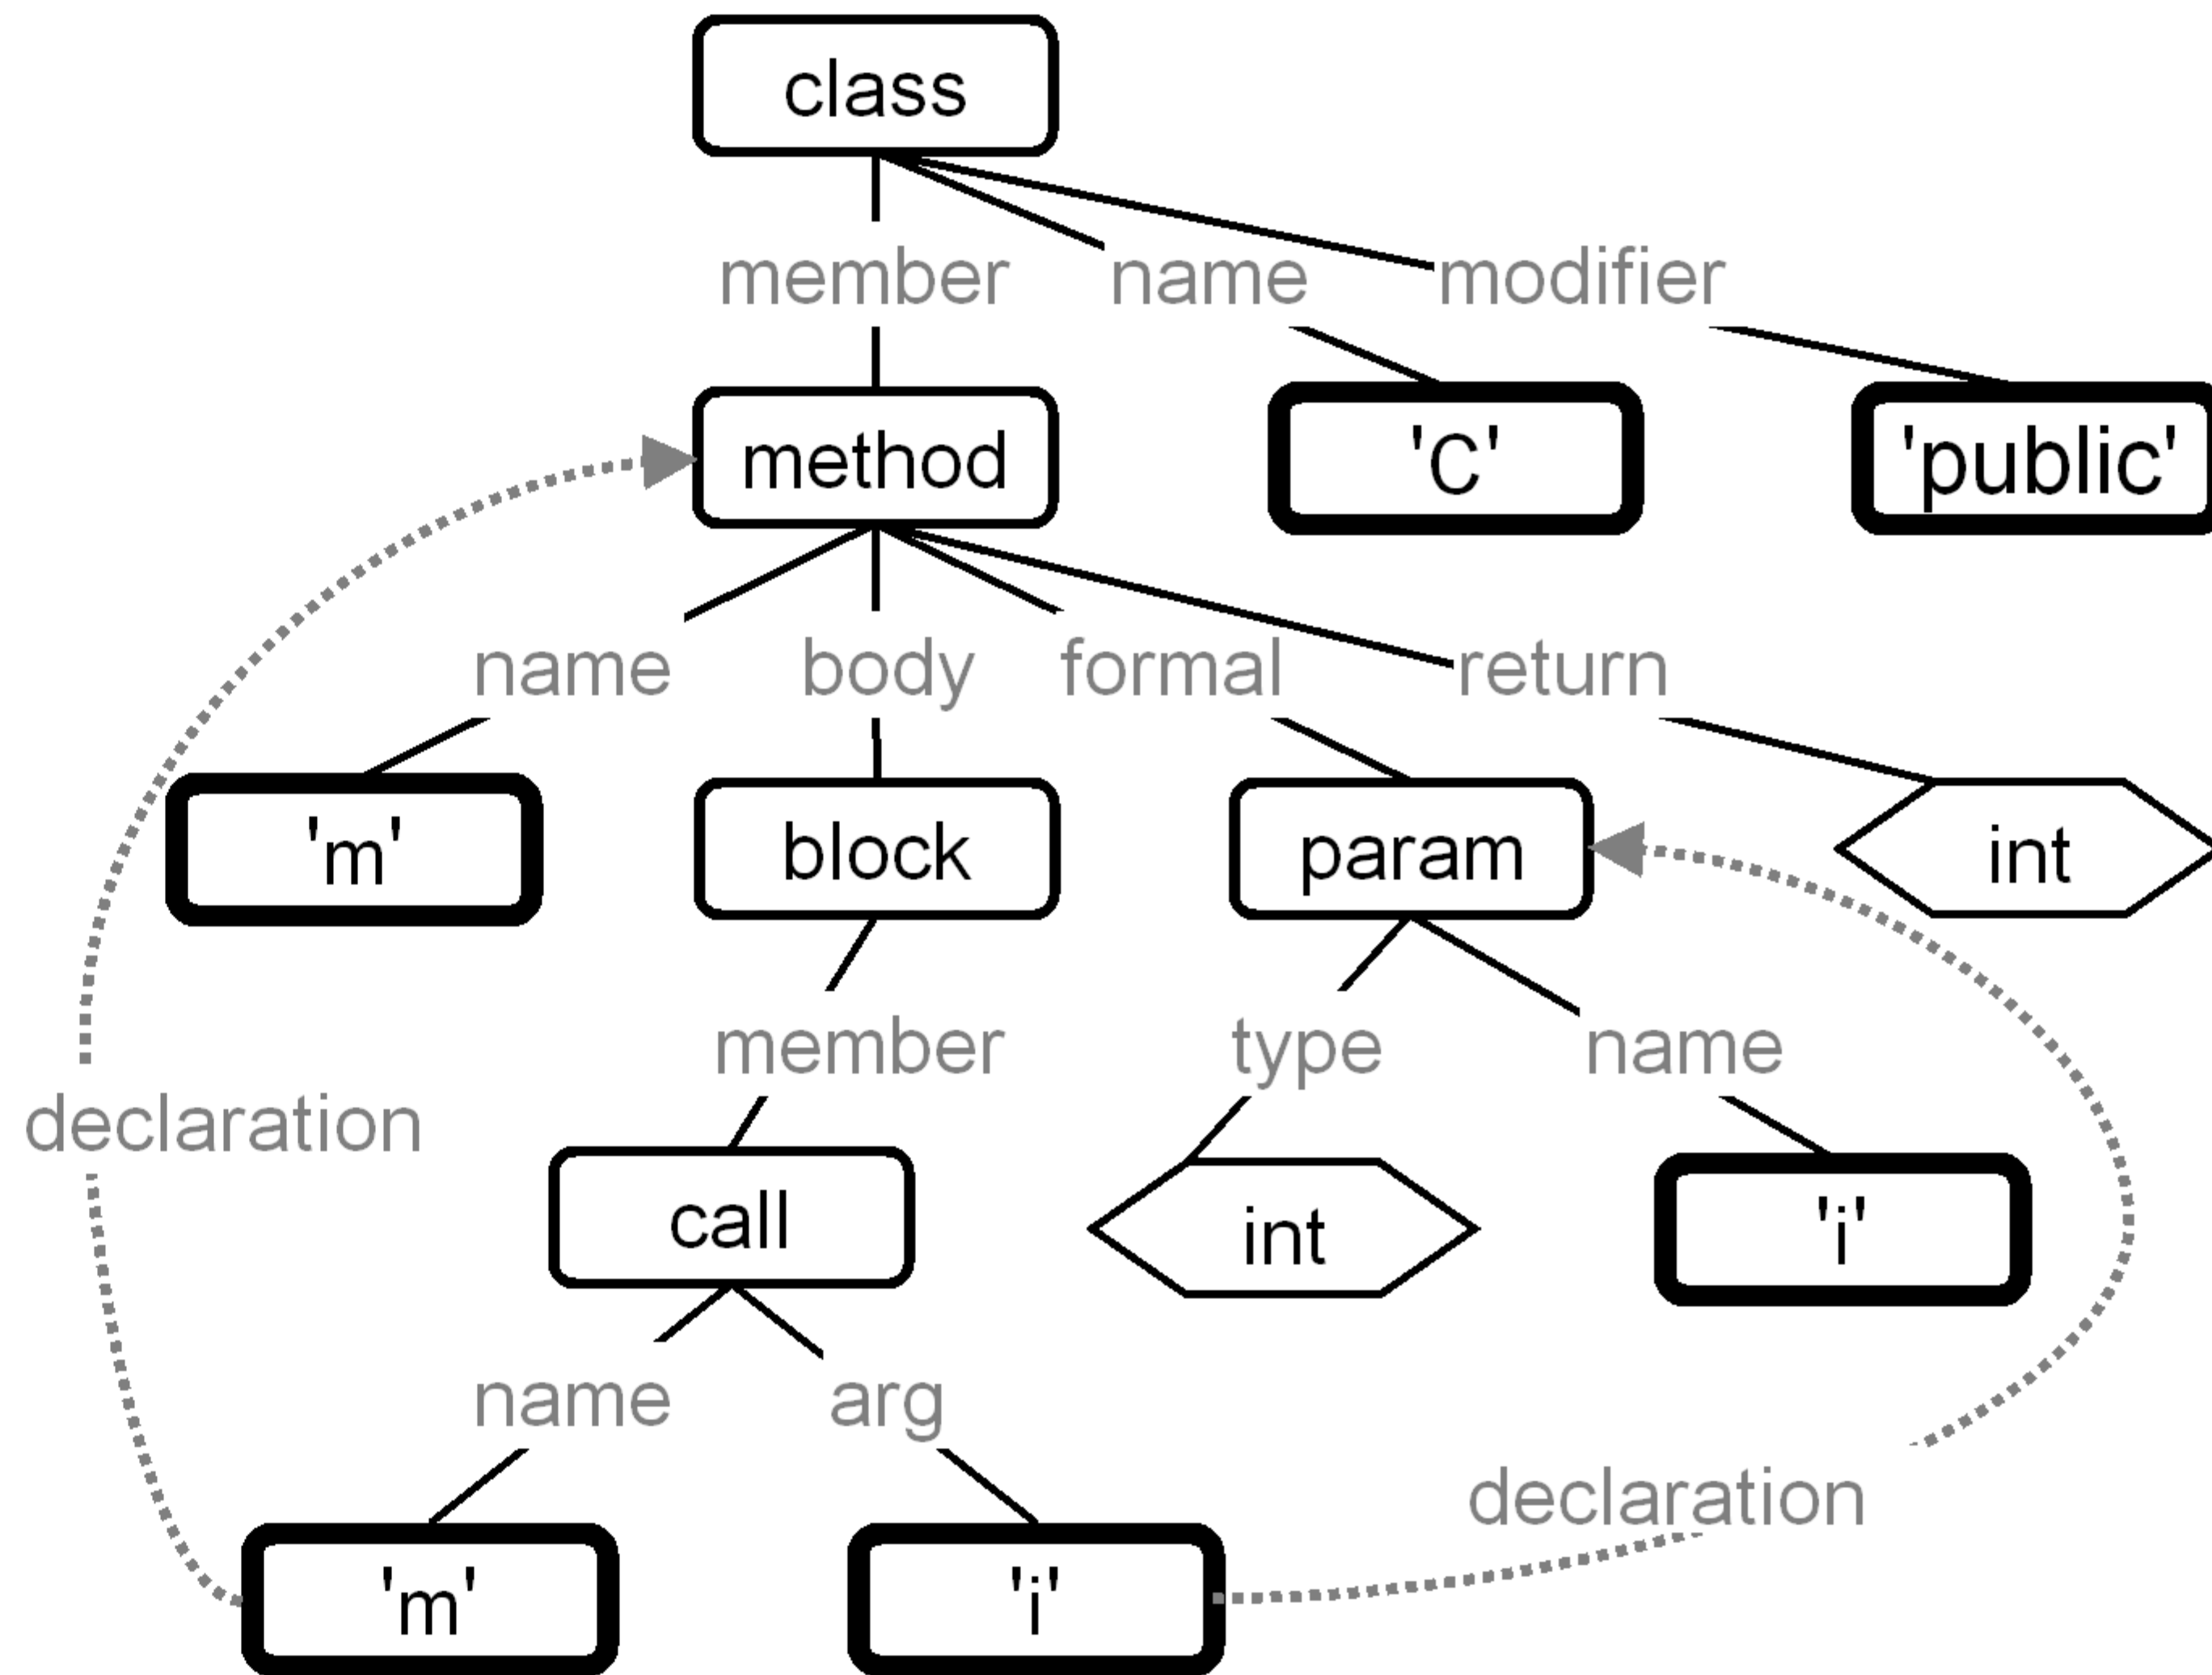

Logic Representation

```
class(1, 'C').  
  modifier(1, 'public').
```

```
  method(2, 1, 'm', [9], 'void').  
    param(9, 2, 'int', 'i').  
    block(10, 2, [12]).  
      call(12, 10, ,this', 'm', [13], 2).  
        ident(13, 12, 'i', 9).
```